


DESIGN WIND PRESSURE (kPa)

MATERIAL	INTERNAL SPAN			END SPAN		
	1200	1500	1800	900	1200	1500
Steel thickness 0.42 mm						
Screw fixed	4.78	3.68	2.60	4.78	3.68	2.60

NOTE :-


1. Linear interpolation may be carried out for pressures and spans not listed.
2. Figures are for one fastener per crest at each support.

FIXING DETAILS

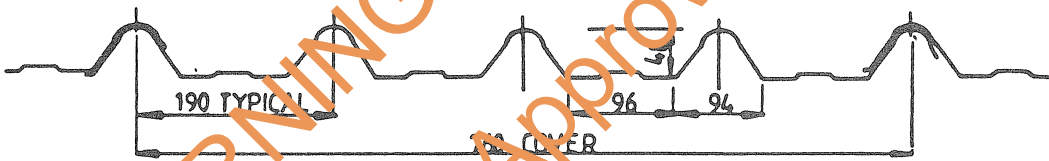


CYCLONE WASHER DETAILS.

NOTE:- Max. 1.6mm T.C.T. Al/Zn coated steel to AS 1397-1984 or A 220).
 Gasket - Black E.P.D.M. 60-45 Durometer.

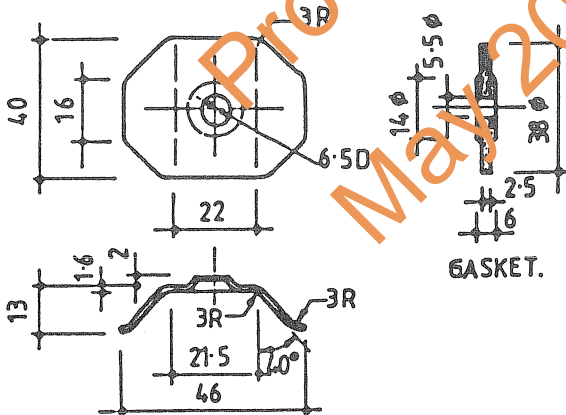


CREST FIXING DETAILS.

1. INTERNAL & EDGE SUPPORTS

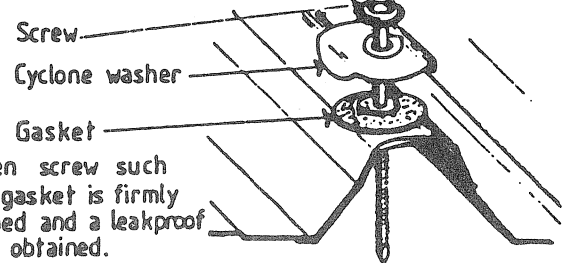

Tighten screw such that gasket is firmly clamped and a leakproof joint obtained.

2. RIDGE & HIP SUPPORT.

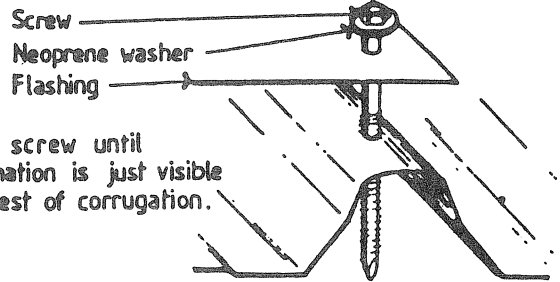

Drive screw until deformation is just visible at crest of corrugation.

FIXING SPECIFICATION

Teks Self-drilling & tapping,
 No. 14 x 65 with hex. head &
 Ø 40 x 1.6 mm thick steel &
 neoprene washers.

MANUF'S. - WOODROFFE SHEETMETAL Pty. Ltd. NAME ADDRESS 1 TAMINGA STREET REGENCY PARK S.A. 5007 PHONE No. (08) 243 1144	FIXING OF: WOODROFFE "Hi-Rib" for Buildings 5m - 10m in height. IN THE DARWIN AREA.	
	DESIGN DATA SHEET	
CERTIFIED <i>[Signature]</i> DATE <i>12/6/87</i>	DEPARTMENT OF LANDS AND HOUSING APP'D. <i>[Signature]</i> DATE <i>6/87</i>	DRAWING No. M/113/12