
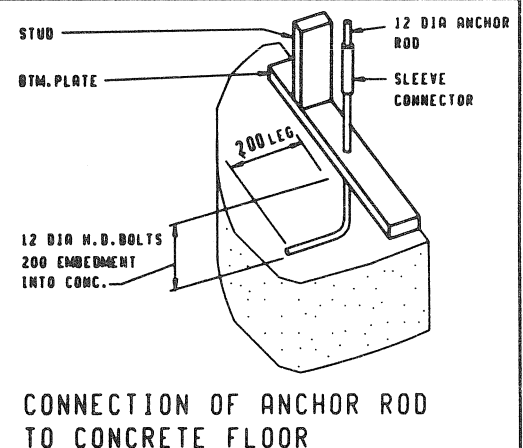
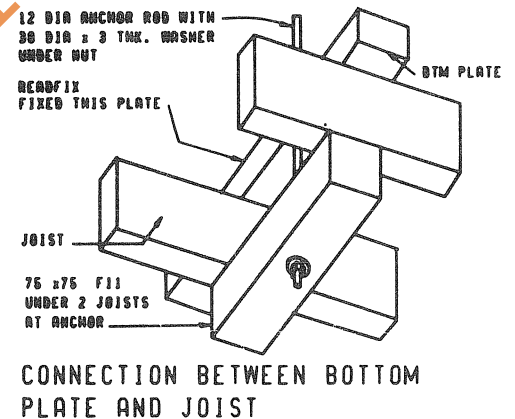
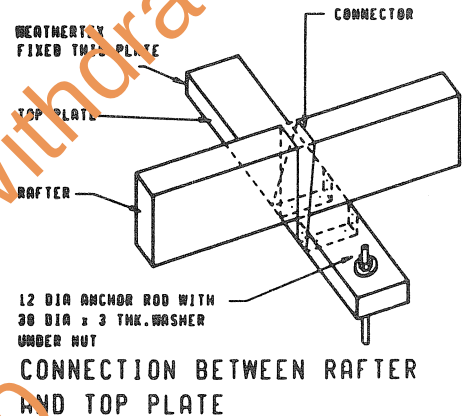


WEATHERTEX

SHEAR WALL - EXTERNAL CLADDING

WALL SYSTEM G 9.5 mm THICKNESS STRUCTURAL
BRACING & EXTERNAL CLADDING - ONE SIDE

DESIGN STRENGTHS RACKING 3.5 kN/m
- UPLIFT WITH RACKING 2.5 kN/m
- UPLIFT ONLY 6 kN/m

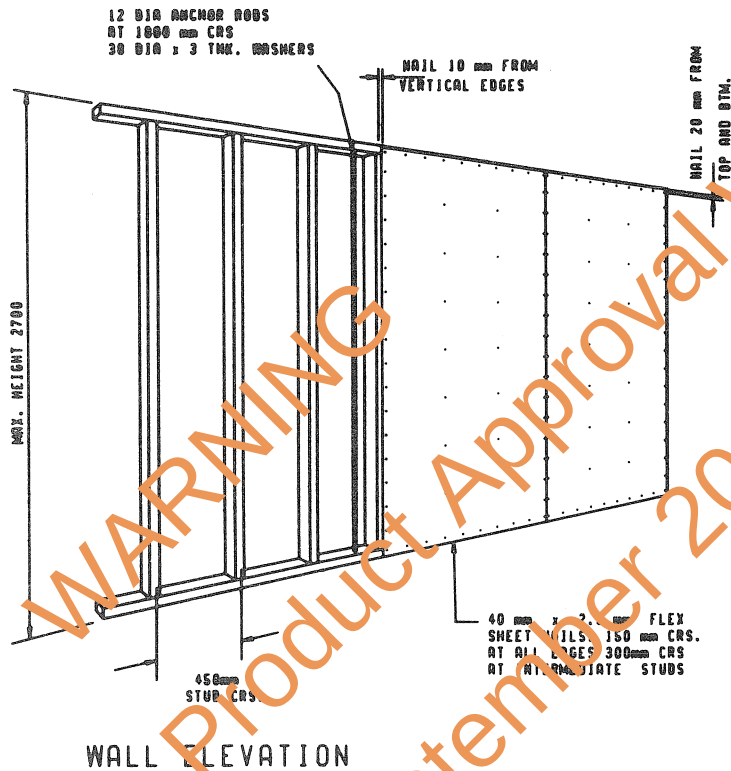

NOTES

1. WALLS LESS THAN 0.9m IN LENGTH SHALL NOT BE USED IN STRENGTH CALCULATIONS.
2. CROSS SECTION SIZE OF ALL TIMBERS SHALL BE 75mm x 50mm MINIMUM.
3. ALL NAILS SHALL COMPLY WITH AS2334-1980 "STEEL NAILS - METRIC SIZES".
4. DRIVE FLEX SHEET NAILS FLUSH WITH BOARD SURFACE.
5. JOISTS TO BE TIED TO BEARERS AND BEARERS TO STUUPS OR WALLS AS REQUIRED BY LOCAL AUTHORITY.
6. CONNECTOR IS A 32mm x 1.2mm CONTINUOUS GALVANISED STRAP FIXED WITH TWO 25mm x 2.0mm GALVANISED CLOUTS INTO EACH OF THE THREE FACES OF THE PLATE AS SHOWN.

MANUF'S NAME CSR TIMBER PRODUCTS
ADDRESS 12 MOUNT STREET, NORTH SYDNEY,
N.S.W. 2060... PHONE No (02) 925 2333.

FIXING OF
9.5 mm WEATHERTEX FOR STRUCTURAL
BRACING & EXTERNAL WALL CLADDING
IN HIGH WIND AREAS INCLUDING DARWIN

DESIGN DATA SHEET

CERTIFIED *J.G. Day B.E.* F.I.E. AUST.
DATE 20 FEB 1986

ACCP'T'D.

J.G. Day B.E. AUST.

DRAWING No
M/212/1