
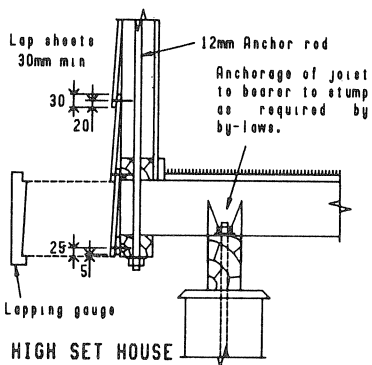
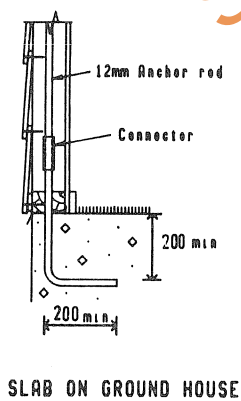


SHEAR WALL - EXTERNAL CLADDING

WALL SYSTEM I 9.5 mm THICKNESS STRUCTURAL
BRACING & EXTERNAL CLADDING ONE SIDE

DESIGN RACKING STRENGTH
2 kN/m FOR 2400 HEIGHT
1.8 kN/m FOR 2745 HEIGHT
UPLIFT WITH RACKING 1.9 kN/m

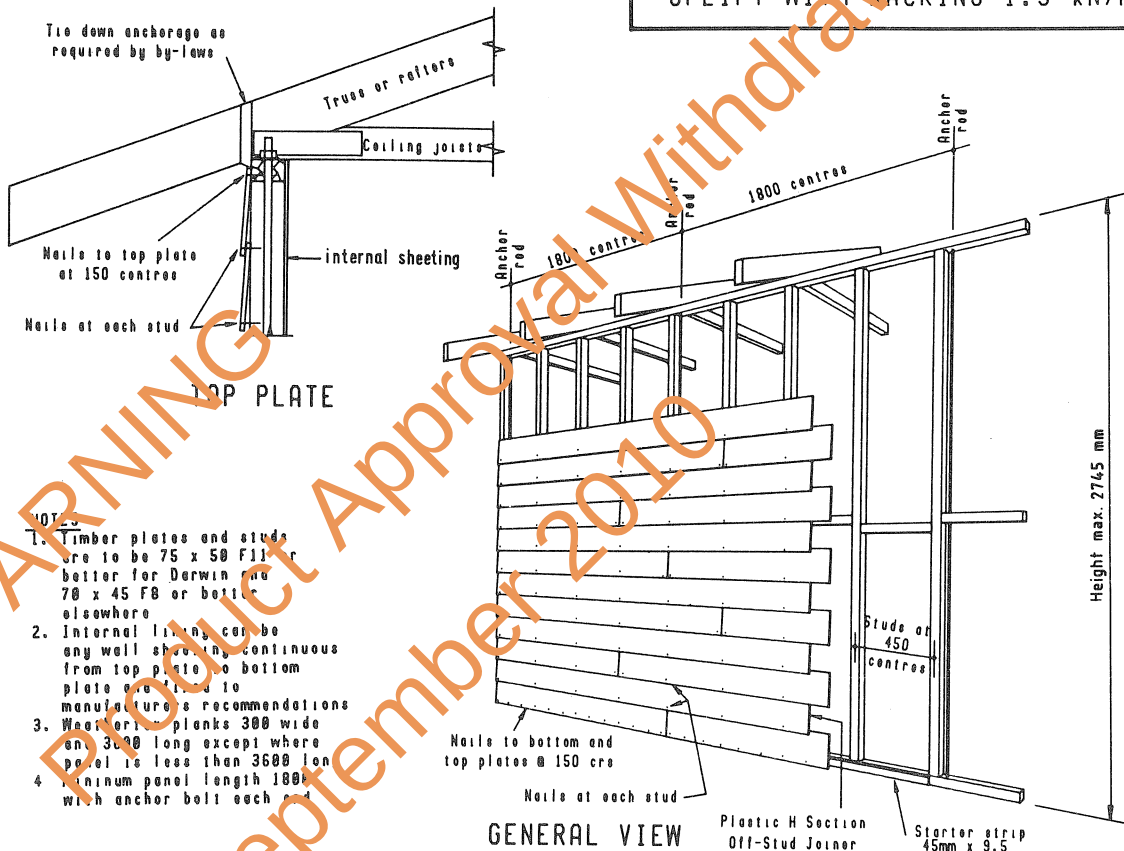

NAILS
All Weathertex 50 x 2.8
flathead galvanised.

ANCHOR RODS
12mm with 38 dia x 3mm
thick washer under all
nuts. Galvanised pre-
ferred.

PAINTING
Apply two coats 100% acrylic latex exterior paint or one undercoat and two coats oil based as recommended by paint manufacturers.

MANUF'S CSR TIMBER PRODUCTS
NAME

ADDRESS 12 MOUNT STREET, NORTH SYDNEY,

N.S.W. 2060... PHONE No (02) 925 2333.

CERTIFIED J.G. Day B.E. F.I.E. AUST.

DATE 12 MAY 1986

FIXING OF 9.5 mm WEATHERTEX PLANKS FOR STRUCTURAL BRACING & EXTERNAL WALL CLADDING

IN HIGH WIND AREAS INCLUDING DARWIN

DESIGN DATA SHEET

DRAWING No

ACCPY'D..... *Henry Naegele* M/212/3

M/212/3