

Table 1.

| Fixings required | |
|--|---|
| ABS plastic base to roof battens | Acrylic dome to ABS base or steel vent |
| 12 off No. 10 x 50mm type 17 screws with neoprene washer, located as shown in Figure 1. Fixings to be common with tile fixings where tile & base overlap. | 8 off No. 8-15 x 15mm Climaseal' coated type 17 screws with neoprene washers, located as shown in Figure 3. Silicone bead to full perimeter of dome to steel vent. |
| Steel vent to ABS base | FIXING NOTES: |
| 8 off No. 8-15 x 15 type 17 screws side fixed. Silicone bead to full perimeter of vent to base. | 1. Fixings to be installed to snug tight fit only to ensure no deformation of body of skylight. 2. Fixings to be minimum class 3 to AS3566. |

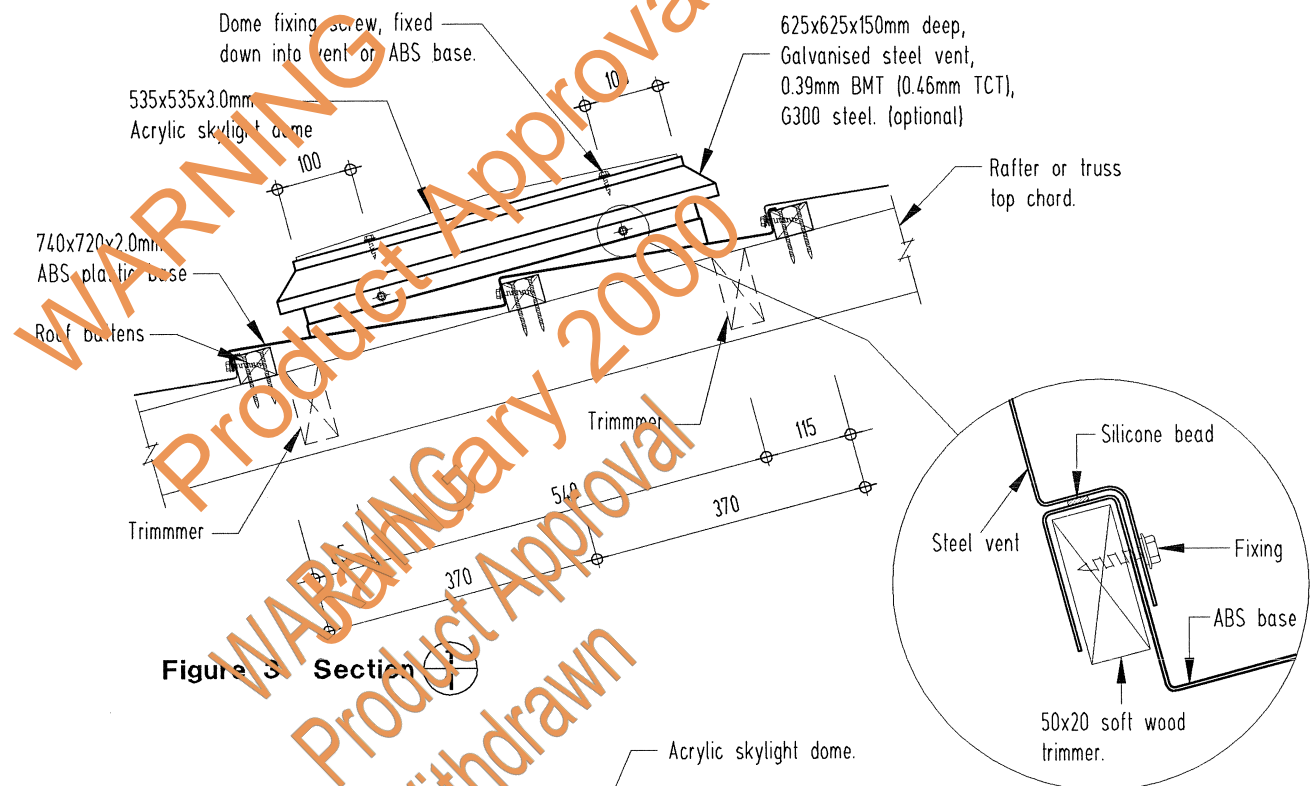


Figure 3 Section 1

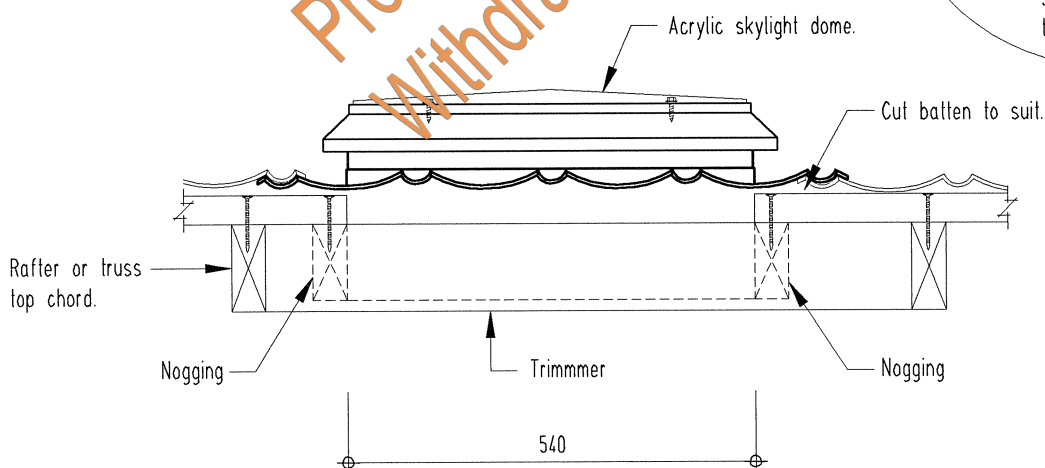


Figure 5 Section 2

Skylight
Sheet 2 of 2

A.C.N. 003 330 783

HTL Reinhold
Engineers, Planners & Managers

C.S. PASCOE BE. FIEAust.

The Association of
Consulting Engineers
AustraliaSuite 2,
96 Woods Street,
Darwin N.T. 0800.P.O. Box 4083
Darwin N.T. 0801PH (08) 8981 7500
FAX (08) 8941 1862**DECRA SKYLIGHT****Carter Holt Harvey**
Roofing Australia Pty. Ltd.

ACN 000 040 023

DESIGN DATA SHEET

| | | |
|----------|--------------|-------------------------|
| APPROVED | DATE 18/1/97 | DRAWING NUMBER. M/102/4 |
|----------|--------------|-------------------------|