
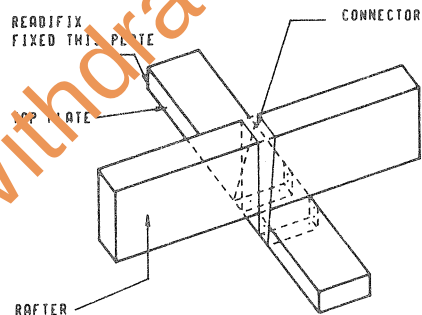


MASONITE READIFIX OR BUDGETBOARD


SHEAR WALL - INTERNAL LINING

WALL SYSTEM E 5.5 mm THICKNESS STRUCTURAL
BRACING & INTERNAL LINING - TWO SIDES

DESIGN RACKING STRENGTH - 2.8 kN/m
NOT SUITABLE FOR UPLIFT

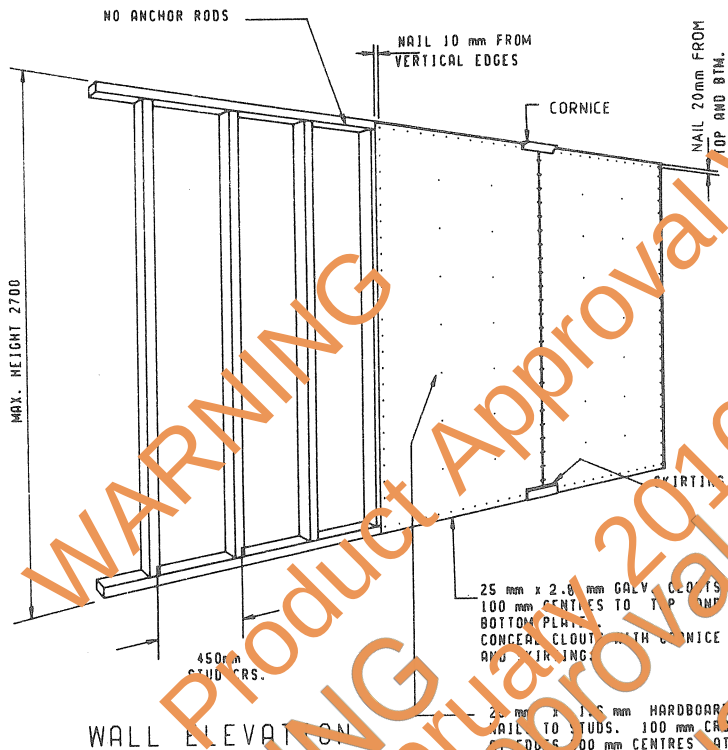


CONNECTION BETWEEN RAFTER
AND TOP PLATE

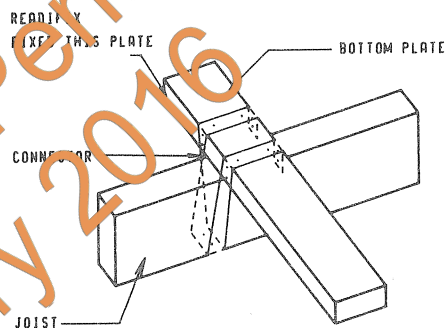

CONNECTION BETWEEN BOTTOM
PLATE AND JOIST

NOTES

2. CROSS SECTION SIZE OF ALL TIMBERS SHALL BE 75mm x 50mm MINIMUM.
3. ALL NAILS SHALL COMPLY WITH ASTM A 307 "STEEL NAILS - METRIC SIZES".
4. DO NOT DRIVE CLOUT NAILS INTO BOARD SURFACE. DRIVE HARDBOARD NAILS FLUSH WITH BOARD SURFACE.
5. FOLLOW MANUFACTURER'S INSTRUCTIONS FOR CONDITIONING OF RADI-FIX OR BUDGET BOARD BEFORE FASTENING.
6. STUDS TO BE TIED TO PLATES, JOISTS TO BE TIED TO BEARERS AND BEARERS TO STUMPS OR WALL AS REQUIRED BY LOCAL AUTHORITY.
7. CONNECTOR PLATE A 32mm x 1.2mm CONTINUOUS GALVANISED STRAP FIXED WITH TWO 25mm x 2.8mm GALVANISED CLOUTS INTO EACH OF THE THREE FACES OF THE PLATE AS SHOWN.

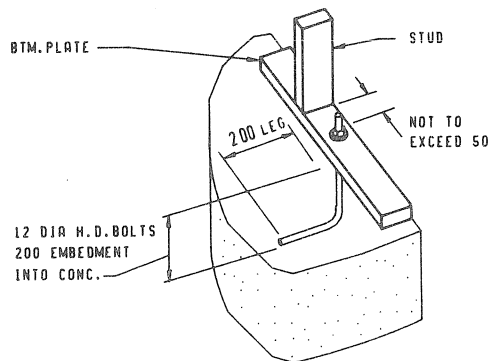

CONNECTION OF BTM. PLATE
TO CONCRETE FLOOR

MANUF'S CSR TIMBER PRODUCTS
NAME

ADDRESS 12 MOUNT STREET, NORTH SYDNEY,

N.S.W. 2060... PHONE No (02) 925 2333.

FIXING OF 5.5 mm MASONITE READIFIX OR MASONITE BUDGETBOARD FOR STRUCTURAL BRACING & INTERNAL WALL LINING

IN HIGH WIND AREAS INCLUDING DARWIN

DESIGN DATA SHEET

CERTIFIED J. J. Day B.E. F.I.E. AUST.

DATE 6th MARCH 1986

ACCP'T'D. 5/1/1944. Navy. Nov. 20

DRAWING No

M/304/5