
SOLA-TUBE TRIMDEK 250

INSTALLATION ON TRIMDEK ROOFING

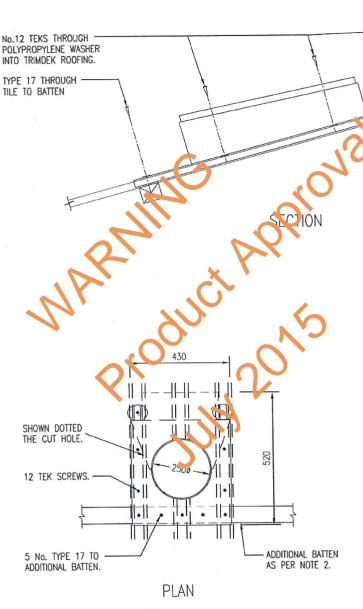

SPECIFICATIONS TRIMDEK 250

20L1

OPYLENE CAP WASHER.

TOP EDGE OF FLASHING

TRIMDEK ZINCALUME OR COLORBOND FIXED TO DTC M/101/15-18.

UNDER ROOFING.

TOTAL HEIGHT INC. DOME AT CENTRE 220mm TURRET HEIGHT AT CENTRE 90mm EXPOSED AREA SIZE L x W OVERALL SIZE 460 x 430 520 x 430 TILE COMPOSITION 3mm THICK POLYPROPYLENE TURRET PITCH 15

NOTES

- 1. MAXIMUM BATTEN SPACING TO BE 540mm WITH THE SOLA-TUBE FITTED BETWEEN.
- 2. AN ADDITIONAL BATTEN, ONE SPAN ONLY OF MATCHING SIZE MAY BE NEEDED TO ACHIEVE NOTE 1.
- 3. THE ADDITIONAL PURLIN TO BE SECURED AS PER DTC M/602/2.
- 4. TRIMDEK ROOFING TO BE SECURED TO THE ADDITIONAL PURLIN AS PER DTC M/101/11-12.
- 5. SUITABLE FOR REGION C TERRAIN CATEGORY 2 UP TO 20 M HEIGHT.
 TEST REPORT No. T.S. 404 04/4/1993
 JAMES COOK UNIVERSITY TOWNSVILLE
 CYCLONE TESTING STATION
 TEST CONFORMING TO A.S. 1170.2 CLAUSE 3.6
- 6. SUPPLIED IN KIT FORM FOR CUSTOM ORB TO BE INSTALLED STRICTLY IN ACCORDANCE WITH THE MANUFACTURERS INSTRUCTIONS USING TEKS TO BATTENS AS REQUIRED.

