
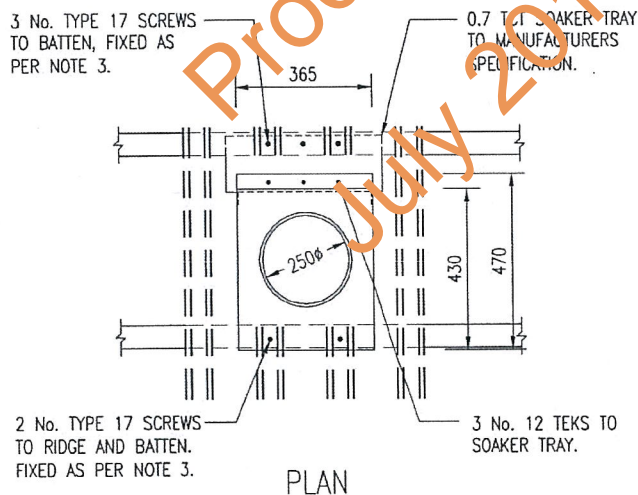


SOLA-TUBE UNIVERSAL 250

INSTALLATION ON METAL DECK ROOFING

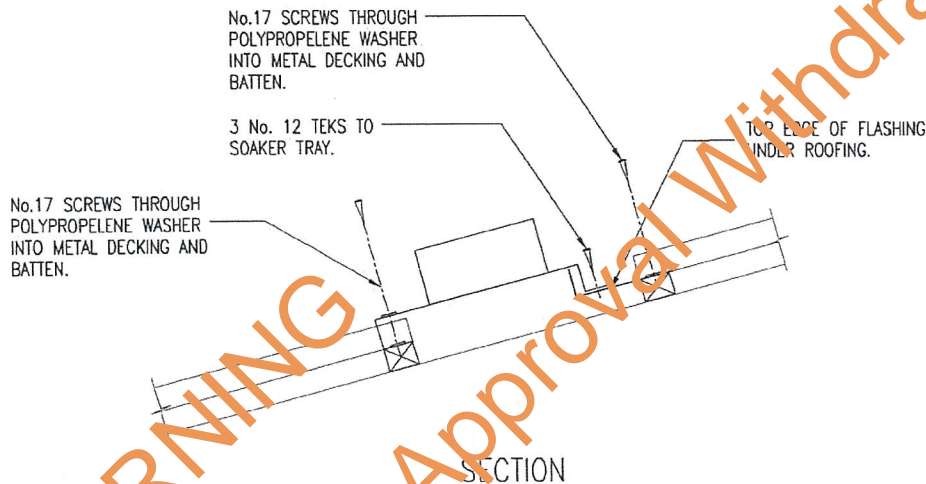

SPECIFICATIONS UNIVERSAL 250

TOTAL HEIGHT INC. DOME AT CENTRE	290mm
TURRET HEIGHT AT CENTRE	90mm
EXPOSED AREA SIZE L x W	430 x 365
OVERALL SIZE	470 x 365
TILE COMPOSITION	3mm THICK POLYPROPYLENE
TURRET PITCH	HORIZONTAL

NOTES

1. POSITION THE HOLE CUT TO RECEIVE THE SOLA-TUBE SO THAT THE MAXIMUM OVERHANG OF THE CUT EDGE IS 250 MM.
2. MAXIMUM PURLIN SPACING IS 860 MM.
3. TRIM OPENING PERIMETER WITH ROOF BATTEN SECTIONS TO BE SECURED AND ROOF DECKING FIXED AS PER D.T.C. M/602/2.
4. SUITABLE FOR REGION C TERRAIN CATEGORY 2 UP TO 6 M HEIGHT.
TEST REPORT No. T.S. 544 18/6/2000
JAMES COOK UNIVERSITY TOWNSVILLE
CYCLONE TESTING STATION
TEST CONFORMING TO A.S. 1170.2 CLAUSE 3.6
5. SUPPLIED IN KIT FORM FOR CUSTOM ORB TO BE INSTALLED STRICTLY IN ACCORDANCE WITH THE MANUFACTURERS INSTRUCTIONS USING TEKS TYPE 17 SCREWS TO BATTENS AS ILLUSTRATED. FIX TO SHEET OR TRAY WITH No. 12 TEKS.

COLLESS O'NEILL



COLLESS & O'NEILL
PTY LTD
CONSULTANTS
DARWIN NT 0801
TELEPHONE (08) 89 819 644
FACSIMILE (08) 89 410 979

SOLA-TUBE UNIVERSAL 250 NATURAL LIGHTING SYSTEM

UNIT 2/5 WENBAN PLACE
WETHERILL PARK NSW 2164

PHONE:
13 16 19

DESIGN DATA SHEET

Certified: *[Signature]* Date: 8-3-01

Adopted by the Building Advisory Committee: *[Signature]* Date: 5/4/01

DARWIN CYCLONE AREA

Approved: *[Signature]*

Date: 13-3-01

Dwg. No.

M1623/4

New Expiry.
Signature. *[Signature]* 3/1/15

New Expiry.
Signature. *[Signature]* 3/1/15