

Plan View

SCALE 1:10

4 No. 6 X 10 PAN HEAD SCREW
AT EQUAL 1/4 POINTS OF ACRYLIC
DOME SKYLIGHT

MOULDED POLYPROPYLENE TILE
SHAPE BASE FIXED AS PER
APPROVED TILE INSTALLATION

NOTE

1. INSTALLATION OF SKYLIGHT TO BE READ IN CONJUNCTION WITH APPROVED ROOF SHEET DTC STANDARDS
2. FIXINGS AS PER SHEET RECOMMENDATION
3. REFER TO MANUFACTURE FOR WEATHER PROOFING REQUIREMENTS AND NOTES

DESIGN CRITERIA

REGIONAL BASIC WIND VELOCITY $V_p = 57$ m/s IN ACCORDANCE

WITH AS 1170.2 1989

O - NOT ABLE TO USE IN THIS AREA

P - ABLE TO BE USED IN THIS AREA

MAXIMUM ALLOWABLE HEIGHT "HT" IN (M)

HT	TERRAIN CAT 2			TERRAIN CAT 2.5			TERRAIN CAT 3.0		
	a/2	a	General	a/2	a	General	a/2	a	General
3.0	O	P	P	P	P	P	P	P	P
5.0	O	P	P	P	P	P	P	P	P
10.0	O	P	P	O	P	P	O	P	P


TOP EDGE OF BASE TO RETURN UNDER ROOF SHEET
AND SEAL WITH PROFILE

USE BI-SEAL ALONG LAPPING EDGE FOR SEAL

FIX LAPP TO ROOF BATTEN

PROVIDE ADDITIONAL BATTEN FIXED AS PER APPROVED
DETAILS

FIX SKYLIGHT BASE IN REPLACEMENT
OF ROOF TILE
BATTENS SET OUT TO APPROVED
DTC REFERENCE SHEET

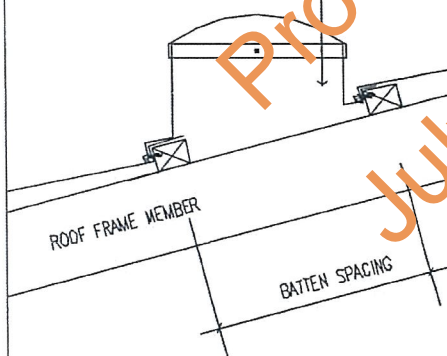

Section A-A

SCALE 1:10

NOTE
SKYLIGHT BASE IS DESIGNED TO FIT TO METAL AND
CONCRETE ROOF TILE
REFER TO SUPPLIERS INSTALLATION RECOMMENDATIONS

SOLA-TUBE AUSTRALIA PTY. LTD.
5 Salisbury Street Castle Hill
n.s.w. Ph 02-8994433

SOLA-TUBE SKYLIGHT for Tile Roof 250 Dia.

DESIGN DATA SHEET

CERTIFIED
DATE

1/5/2002

DARWIN CYCLONIC AREA

APPROVED

Signature

DATE

27-5-02

DRG. No.

M/623/9

New Expiry. 3/7/05
Signature.

New Expiry. 3/7/05
Signature.