

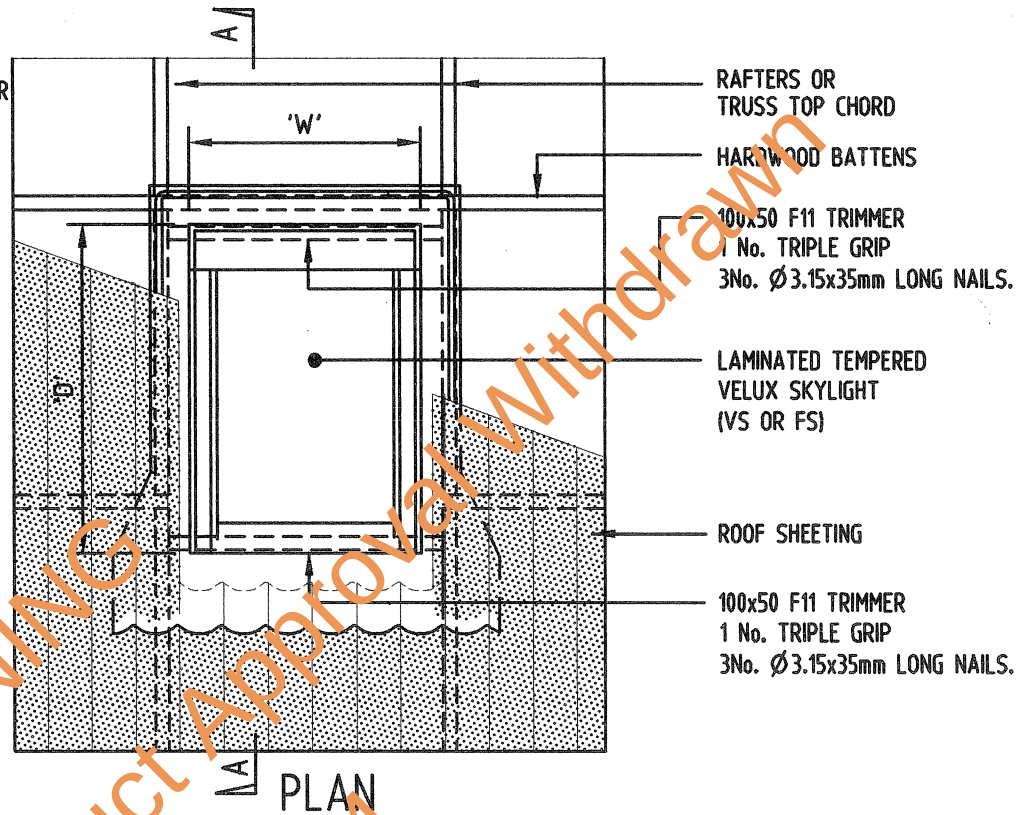


NOTES:

1. DO NOT CUT ANY STRUCTURAL MEMBER ON SITE WITHOUT PRIOR APPROVAL BY STRUCTURAL ENGINEER.
2. FLASHING AND WATERPROOFING REQUIREMENTS TO BE IN ACCORDANCE WITH THE MANUFACTURERS INSTRUCTIONS.
3. BATTEN SPACING, SIZE AND FIXING IN ACCORDANCE WITH D.T.C. REQUIREMENTS.

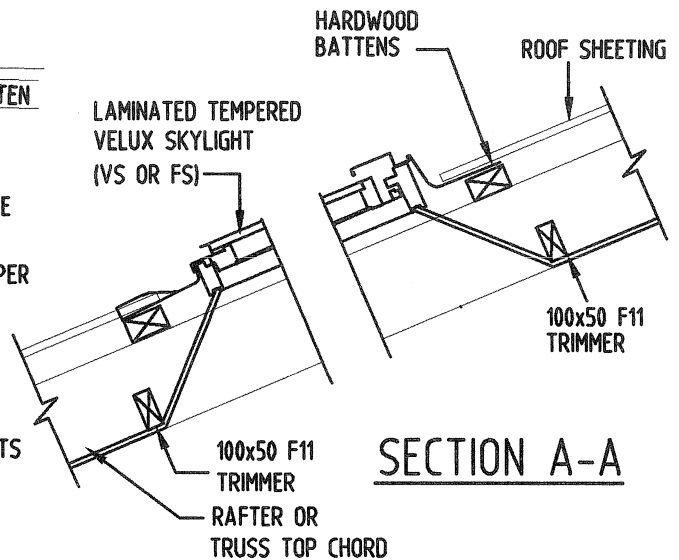

SOUTHERN YELLOW PINE TIMBER FRAME,
UNPAINTED, MOULD AND MILDEW TREATED.

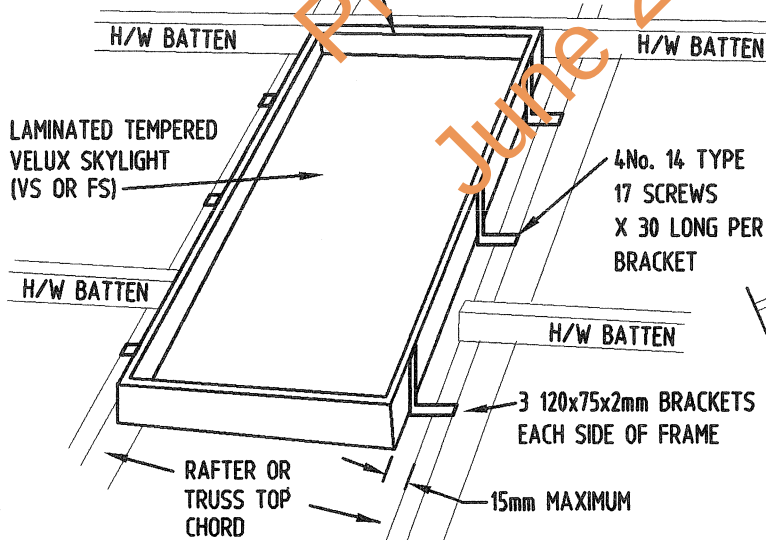

MODEL #	FRAME SIZE (W x D) mm	MAXIMUM ALLOWABLE STRUCTURE HEIGHT			ALLOWABLE WIND PRESSURE
		T.C. = 2	T.C. = 2.5	T.C. = 3	
VS0075-104	550 x 980	7.5m	7.5m	7.5m	4.6KPa
601	1140 x 700	-	-	6.0m	2.7KPa
FS0048-104	550 x 980	7.5m	7.5m	7.5m	5.0KPa
304	780 x 980	4.5m	7.5m	7.5m	3.8KPa
308	780 x 1140	-	-	6.0m	2.7KPa
601	1140 x 700	-	6.0m	7.5m	3.4KPa
101	550 x 700	-	7.5m	7.5m	6.4KPa

RUST PPK

Environment & Infrastructure

100 NORTH TERRACE ADELAIDE
SOUTH AUSTRALIA, 5000
TELEPHONE (08) 8405 4300
FAX: (08) 8212 4686
JOB No. 22H104A

Velux Skylights

DESIGN DATA SHEET

CERTIFIED

DATE

DARWIN CYCLONIC AREA

APPROVED

DATE

DRAWING NUMBER

M/632/1