
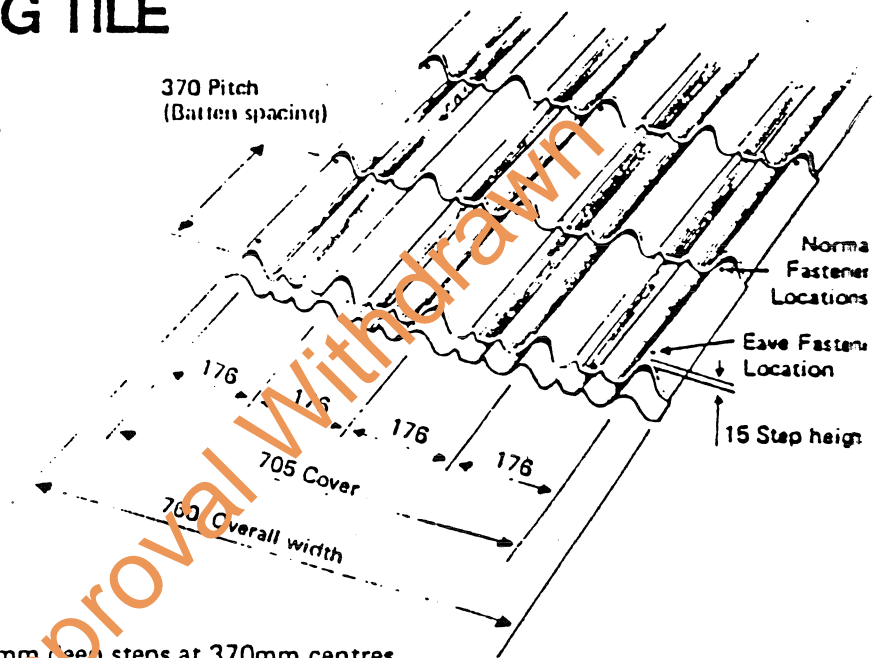


LUXALON ROOFING TILE

PERFORMANCE

DESIGN WIND PRESSURES

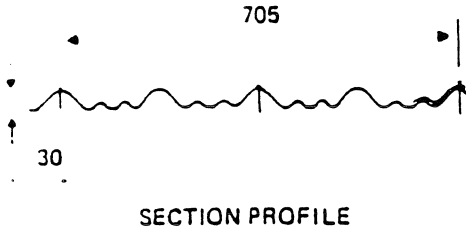

PRODUCT SPECIFICATION:

Preformed long run roof sheet with 15mm deep steps at 370mm centres.
Sheet cover - 705mm and length to suit application.

DESIGN WIND PRESSURE

DECK MATERIAL	DECK THICKNESS	WORKING PRESSURE (kPa)
STEEL	.48 TCT	4 kPa - FIXINGS EVERY SECOND RIB
STEEL	.48 TCT	10 kPa - FIXINGS EVERY RIB

MINIMUM ROOF PITCH IS 7½°

LUXALON ROOFING TILE PERFORMANCE.

This table has been produced after an extensive test program to ensure that "Luxalon Roofing Tile" meets the requirements of the "N.T. Building Manual" for a 1.8 proof load applied statically on conclusion of a fatigue test of 10,000 cycles of loading from zero to full working load, and AS 1562 - 1973 "Design and installation of self-supporting metal roofing without transverse laps."

LUXALON ROOFING TILE - RECOMMENDED FASTENINGS.	
HARDWOOD BATTENS	No 12 x 50mm HEX HD. TYPE 17 + NEO WASHERS FASTEN THROUGH CREST OF RIB

BATTEN SPECIFICATION:- FOR RAFTERS AT 1,200 CENTRES - USE 75mm x 38mm
FOR RAFTERS AT 900 CENTRES - USE 50mm x 38mm

Enquiries and further information available from: HANDFORD INDUSTRIES DARWIN (089) 81 2218
HANDFORD INDUSTRIES BRISBANE (07) 265 2999

DESIGN DATA SHEET Northern Territory Cyclonic Areas

Manufacturer:
HANDFORD INDUSTRIES PTY LTD
Phone No. 265 0443
Address:
19 PRITCHARD ROAD, VIRGINIA,
BRISBANE, Q. P.O. BOX 157 NUNDAH, 4012.

Certified *Paul J. Clarkson* MIE (Aust)
Date *24/11/82*

Subject: Fixing, in the Darwin area of
LUXALON ROOFING TILE

Approved *[Signature]*
Date *22 FEBRUARY 1983*

DRG No. M/103/18