




SPECIFICATION

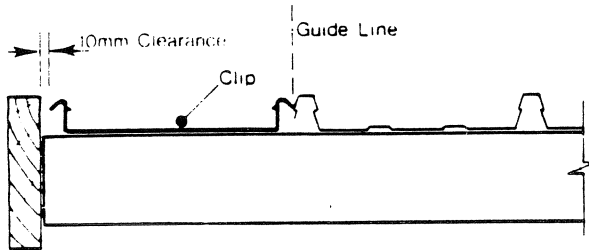


Step 1. Use first tray as guide line to fix first row of clips allowing 10mm clearance between clip and fascia or edge of roof.

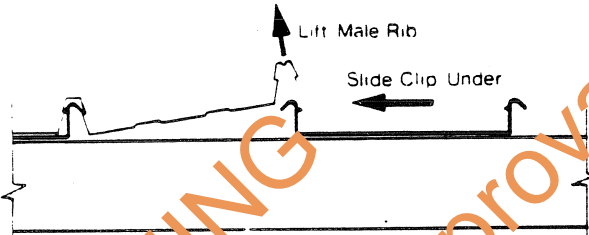

Step 3. Lift male rib of tray sufficiently to slide under next row of clips.

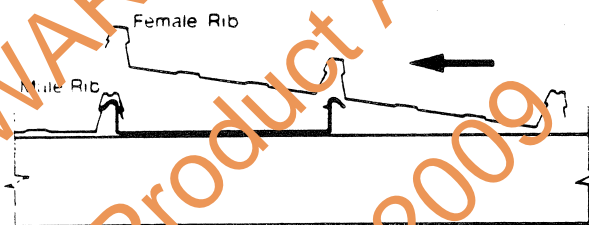

Step 5. Place next tray in position by sliding up onto the clips as indicated.

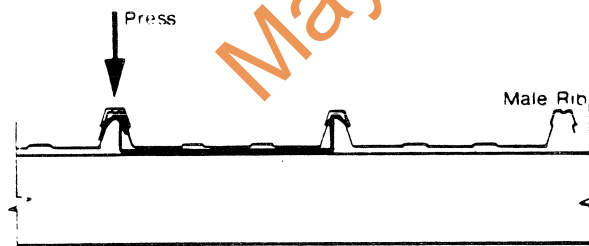


Step 7. Now engage the female rib over the male rib by firstly applying pressure directly over the purlins (as indicated on roof plan opposite) and then working both ways from the purlins to centre span for final clipping action. **Do not try to engage ribs in one continuous action from one end to the other.**


Step 8. Repeat steps 3 to 7 until entire roof area is covered.

SPEED DECK (mark III)


FIXING RECOMMENDATIONS

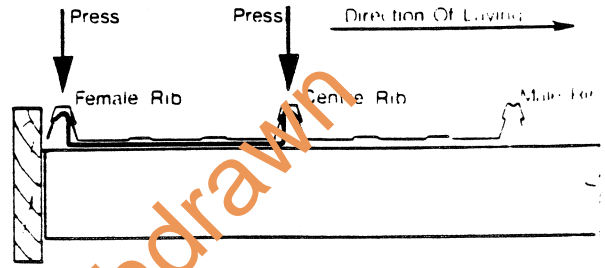


Step 2. Snap first tray onto clips applying pressure at the points indicated.

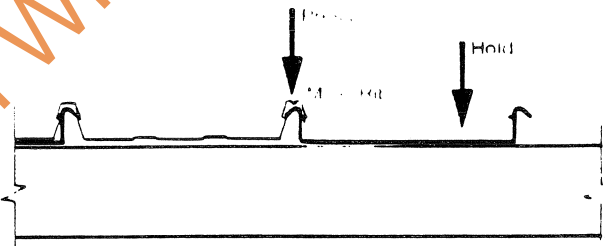

Step 4. Hold clip flat on purlin, apply pressure on male rib until it snaps into position over the clip. Secure clips to purlins.

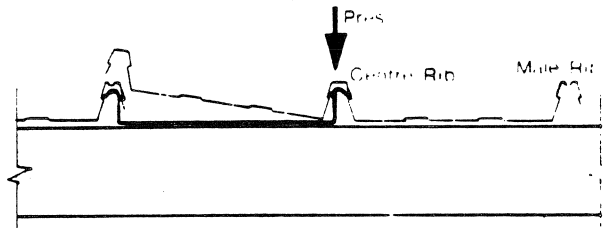

Step 6. Apply pressure as shown and engage centre rib on clips along entire length of tray.

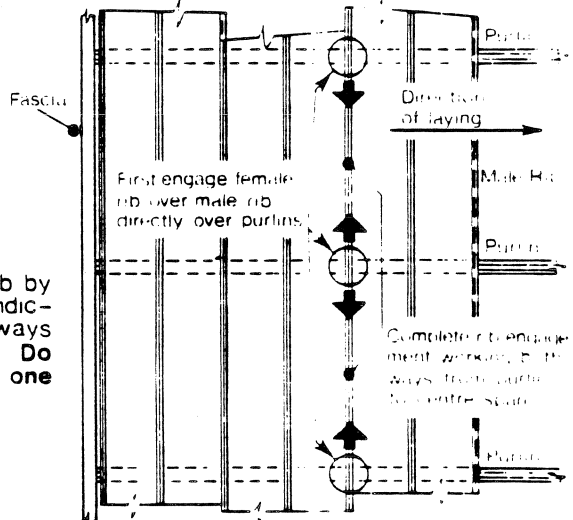

HOUSE DETAILS

OWNER: _____
 LOT No: _____
 STREET: _____
 DISTRICT: _____
 TERRAIN CATEGORY: _____
 MULTIPLIER: _____

FIXING OF

STRAMIT "SPEED DECK" ROOFING

IN THE DARWIN AREA

SPECIFICATION SHEET

NORTHERN TERRITORY
 CYCLONIC AREAS

DRAWING No.

M/109/10

Accptd

Date

WARNING Product Approval Withdrawn May 2009