


MASONITE READIFIX OR BUDGETBOARD




SHEAR WALL - INTERNAL LINING

WALL SYSTEM B 5.5 mm THICKNESS STRUCTURAL
BRACING & INTERNAL LINING - ONE SIDE

DESIGN STRENGTHS - RACKING 3 kN/m
- UPLIFT WITH RACKING 2.5 kN/m
- UPLIFT ONLY 6 kN/m

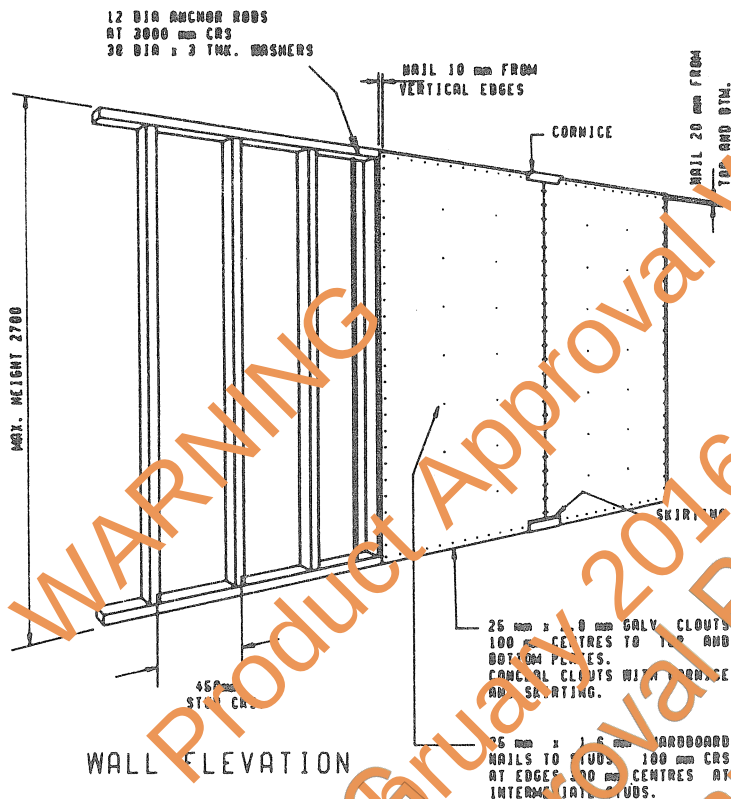

WALL ELEVATION

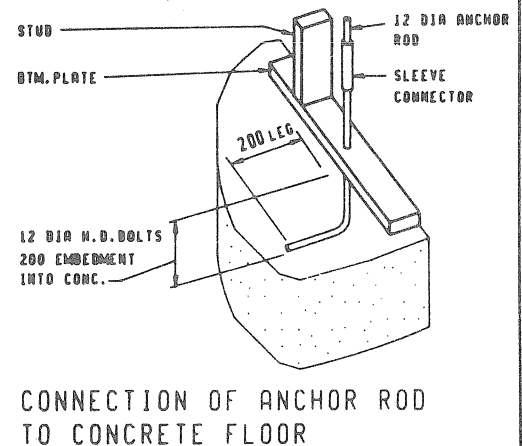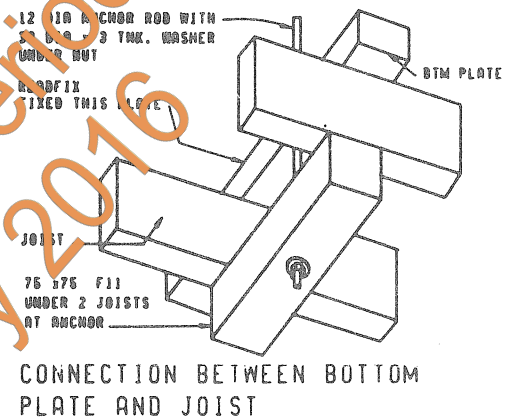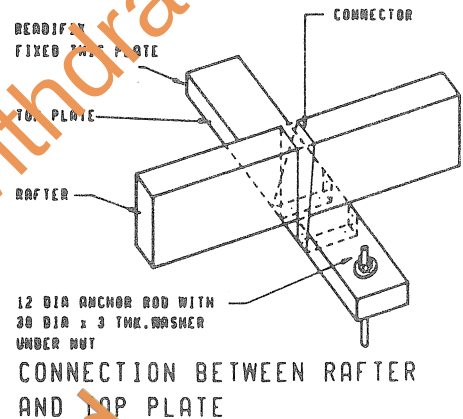

NOTES

1. WALLS LESS THAN 3.0m IN LENGTH SHALL NOT BE USED IN STRENGTH CALCULATIONS.
2. CROSS SECTION SIZE OF ALL TIMBERS SHALL BE 75mm x 100mm MINIMUM.
3. ALL NAILS SHALL COMPLY WITH AS2324-1.90 "STEEL NAILS - METRIC SIZES".
4. DO NOT DRIVE CLOUT HEADS INTO BOARD SURFACE. DRIVE HARDBOARD NAILS FLUSH WITH BOARD SURFACE.
5. FOLLOW MANUFACTURER'S INSTRUCTIONS FOR CONDITIONING OF READIFIX OR BUDGETBOARD BEFORE FASTENING.
6. JOISTS TO BE TIED TO BEAMS AND BEARERS TO STUMPS OR WALLS AS REQUIRED BY LOCAL AUTHORITY.
7. CONNECTOR IS 50mm x 25mm x 2.0mm CONTINUOUS GALVANISED STRAP FIXED WITH TWO 5mm x 2.0mm GALVANISED CLOUTS INTO EACH OF THE THREE FACES OF THE PLATE AS SHOWN.

MANUF'S CSR TIMBER PRODUCTS
NAME

ADDRESS 12 MOUNT STREET, NORTH SYDNEY,
N.S.W. 2060... PHONE No (02) 925 2333.

CERTIFIED J.G. Day B.E. F.I.E. AUST.

DATE 20 FEB 1986

FIXING OF 5.5 mm MASONITE READIFIX OR
MASONITE BUDGETBOARD FOR STRUCTURAL
BRACING AND INTERNAL WALL LINING

IN HIGH WIND AREAS INCLUDING DARWIN

DESIGN DATA SHEET

ACCP'T'D. J.G. Day M.E. AUST.

DRAWING No

M/304/2....