


MASONITE READIFIX OR BUDGETBOARD




SHEAR WALL - INTERNAL LINING

WALL SYSTEM D 5.5 mm THICKNESS STRUCTURAL
BRACING & INTERNAL LINING - TWO SIDES

DESIGN STRENGTHS - RACKING 4.7 kN/m
- UPLIFT WITH RACKING 4 kN/m
- UPLIFT ONLY 10 kN/m

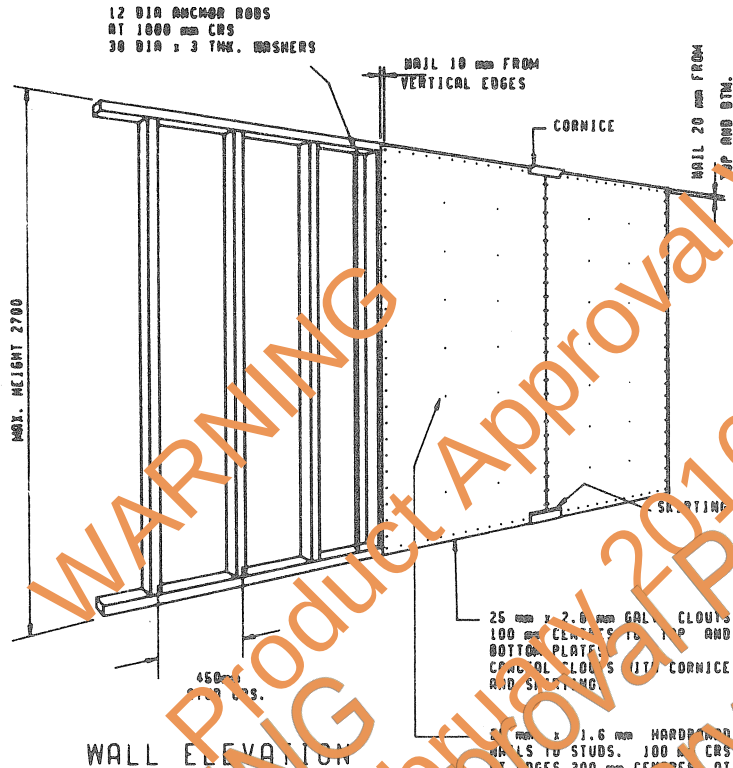

WALL ELEVATION

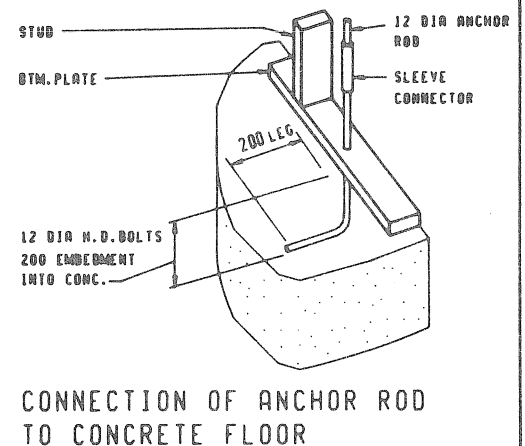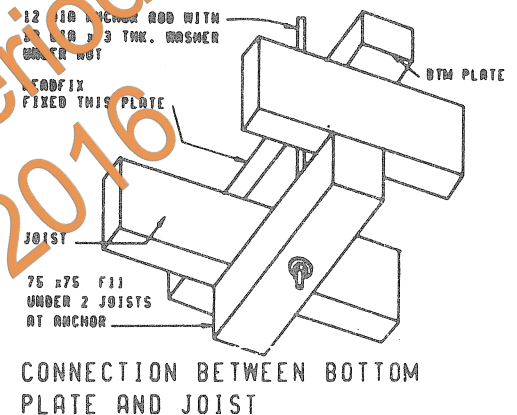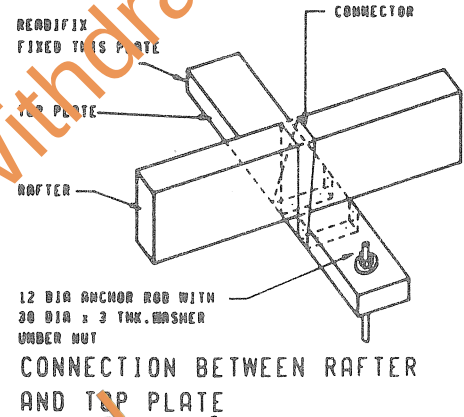

NOTES

1. WALLS LESS THAN 3.5 m IN LENGTH SHALL NOT BE USED IN STRENGTH CALCULATION.
2. CROSS SECTION SIZE OF ALL TIMBERS SHALL BE 75mm x 50mm MINIMUM.
3. ALL NAIL SHALL COMPLY WITH AS2384-1980 "STEEL NAILS - METRIC SIZES".
4. DO NOT DRIVE NAIL HEADS INTO BOARD SURFACE. DRIVE HARDBOARD NAILS FLUSH WITH BOARD SURFACE.
5. FOLLOW MANUFACTURER'S INSTRUCTIONS FOR CONDITIONING OF READIFIX OR BUDGETBOARD BEFORE FASTENING.
6. JOISTS TO BE TIED TO BEARERS AND BEARERS TO STUMPS OR WALLS AS REQUIRED BY LOCAL AUTHORITY.
7. CONNECTOR IS A 32mm x 1.2mm CONTINUOUS GALVANISED STRIP FIXED WITH TWO 25mm x 2.0mm GALVANISED CLOUDS INTO EACH OF THE THREE FACES OF THE PLATE AS SHOWN.

MANUF'S NAME CSR TIMBER PRODUCTS

ADDRESS 12 MOUNT STREET, NORTH SYDNEY,

N.S.W. 2060... PHONE No (02) 925 2333.

CERTIFIED *J. Day* B.E. F.I.E. AUST.

DATE 20 FEB 86

FIXING OF 5.5 mm MASONITE READIFIX OR
MASONITE BUDGETBOARD FOR STRUCTURAL
BRACING AND INTERNAL WALL LINING

IN HIGH WIND AREAS INCLUDING DARWIN

DESIGN DATA SHEET

ACPT'D. *M.E.L. (AUST)*

DRAWING No

M/304/4