


- 1 STORAGE TANK - 1 OFF.
- 2 ABSORBER - 2 OFF.
- 3 TANK STRAPS - CYCLONE RESTRAINT - OFF
- 4 1/4 DIA 3/4 CAD PLATED BOLTS & NUTS - 4 OFF.
- 5 5/16 DIA #1 - 16 .. ROOF PITCH ABOVE 10°
22 .. BELOW 10°
- 6 65x56x3 PLATE - CYCLONE RESTRAINT 8 OFF
- 7 133x12 TOP HAT SECTION - 2 OFF. ROOF PITCH ABOVE 10°
1 OFF. BELOW 10°
- 8 75x51x16 GALV ANGLE - 2 OFF.
- 9 TYPE 17 DUCHER SCREWS EVERY 3RD CORRUGATION.
- 10 Z SECTION 51x25x2 GALV STEEL - 2 OFF.
- 11 38x38x3 GALV ANGLE - 2 OFF.
- 12 " " GALV ANGLE - 1 OFF.
- 13 25x25x3 GALV ANGLE - 1 OFF.
- 14 75x51 TIMBER BATTEN.

ITEMS 9 & 14 BY INSTALLER OR BUILDER

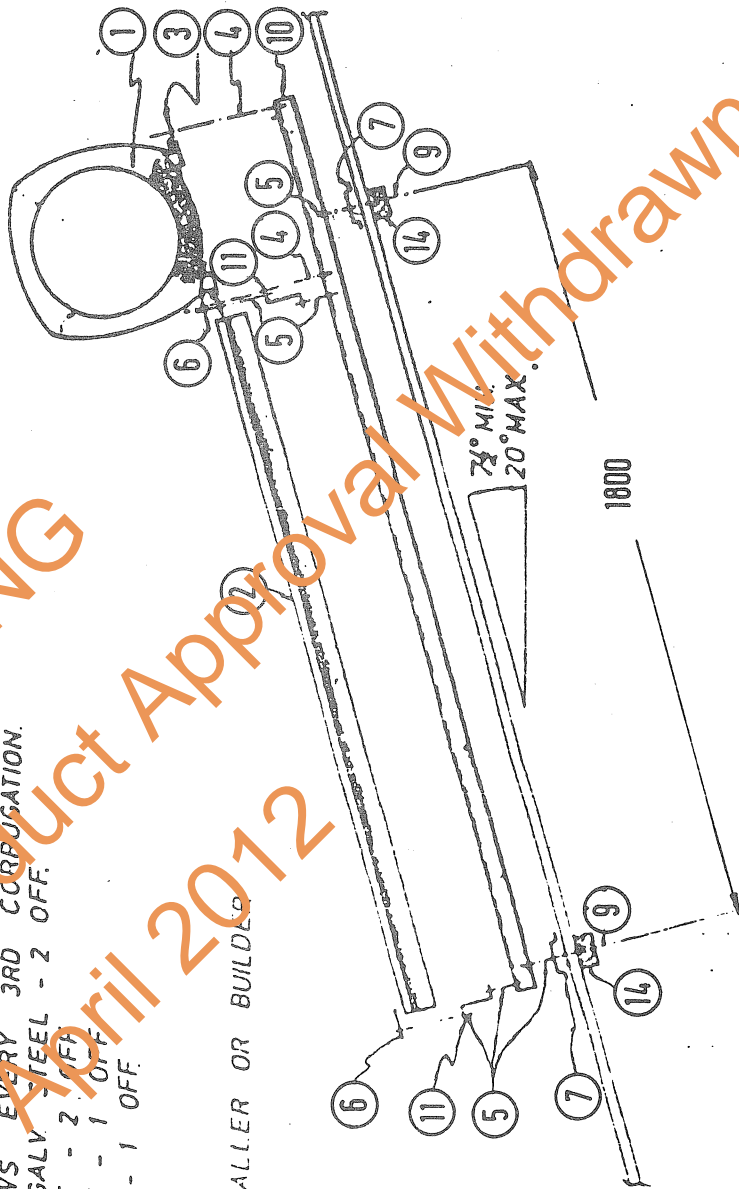

'ALTERNATIVE OPTION'

STANDARD "WITH PITCH" INSTALLATION

SOLAHART PTY. LTD. 426 STUART HIGHWAY WINNELLIE DARWIN. N.T. PH. (089) 84-4959

Colless & Associates pty. ltd.

Consulting Engineers
Darwin N.T. (089) 819644

FIXING FOR SOLAHART 300 LITRE
H.W. HEATERS WITH PITCH ROOFS

DESIGN DATA SHEET.

Certified T. Dwyer
Date 31-7-84

DARWIN CYCLONE AREA.

DWG. N°

APP'D M. I.E. AUST

DATE 31-7-84

M/503/2A