



1. ALL WORK MUST BE UNDERTAKEN IN ACCORDANCE WITH THE STANDARD SPECIFICATION FOR SUBDIVISIONS ALONG WITH PROJECT SPECIFIC AMENDMENTS.
2. STREET Nos. ARE ONLY REQUIRED WHERE NOMINATED ON PROJECT DRAWINGS OR REQUIRED BY RELEVANT AUTHORITY.
3. ALL STREET NAME SIGN POSTS MUST BE REMOVABLE.
4. STREET NAME SIGN COLORS, LETTER SIZE, LETTER TYPES TO CONFORM TO AS1742.5. SPECIAL DECORATIVE, HERITAGE, OTHER SIGN STYLES SUBJECT TO APPROVAL OF RELEVANT AUTHORITY.
5. ALUMINUM STREET NAME SIGN TO CONSIST OF RETRO-REFLECTIVE MATERIALS AS PER AS1906.1.
6. TYPE OF FOOTING TO BE AGREED WITH RELEVANT AUTHORITY.
7. SIGN POST HEIGHT MUST BE TO AS1742. SETOUT OF STREET NAME SIGN POST TO BE 750mm BEHIND KERB SET OUT LINE OR 2000-4000mm FROM EDGE OF SEAL, ALIGNED WITH PROPERTY BOUNDARY PROJECTION OF MINOR ROAD.
8. STREET NAME SIGN POSTS MUST HAVE MIN 0.5m CLEARANCE FROM ALL PATHWAYS.
9. FIXING TO UTILITY POLES: USE 13mm WIDE 'BAND-IT' STAINLESS STEEL STRAPPING OR APPROVED EQUIVALENT. SUBJECT TO APPROVAL BY SERVICE AUTHORITY.
10. ALL STEEL PIPES MUST BE CLASS 1 TO AS1074.
11. ALL STEEL PLATES MUST BE AS3678.
12. ALL FITTINGS AND POSTS MUST BE HEAVY HOT DIPPED GALVANISED IN ACCORDANCE WITH AS4680.
13. CONCRETE SUPPLY AND PLACEMENT MUST COMPLY WITH AS1379, AS3600 AND STANDARD SPECIFICATION FOR SUBDIVISIONS.

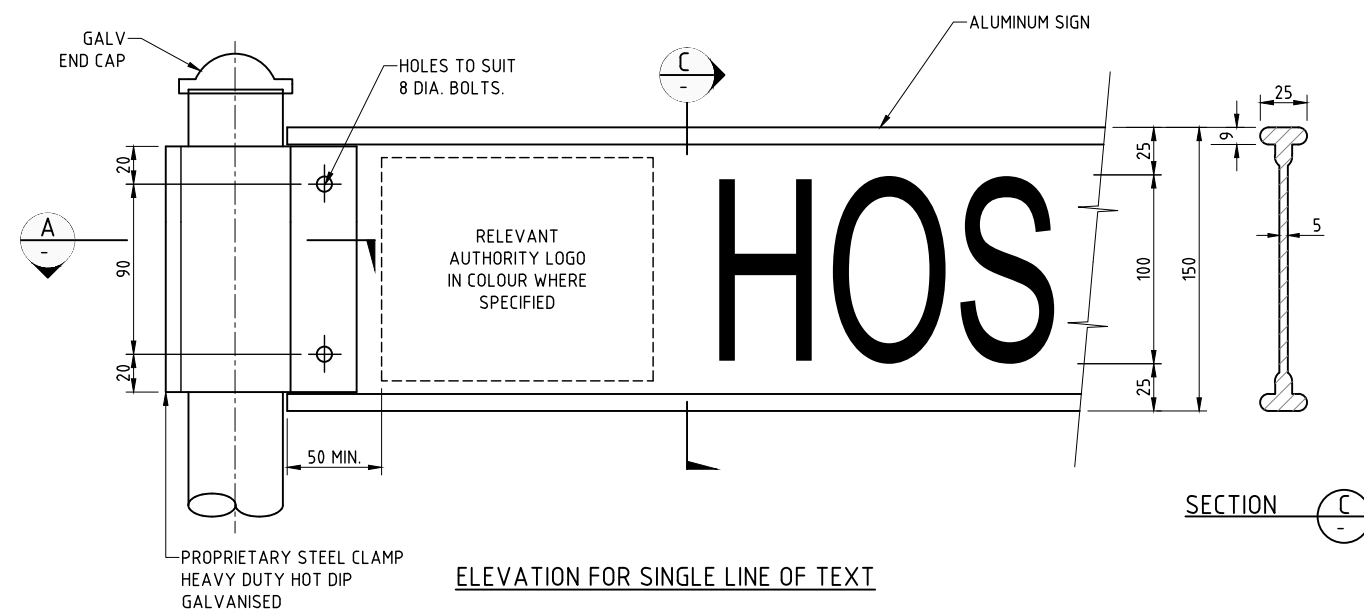

NOT TO SCALE

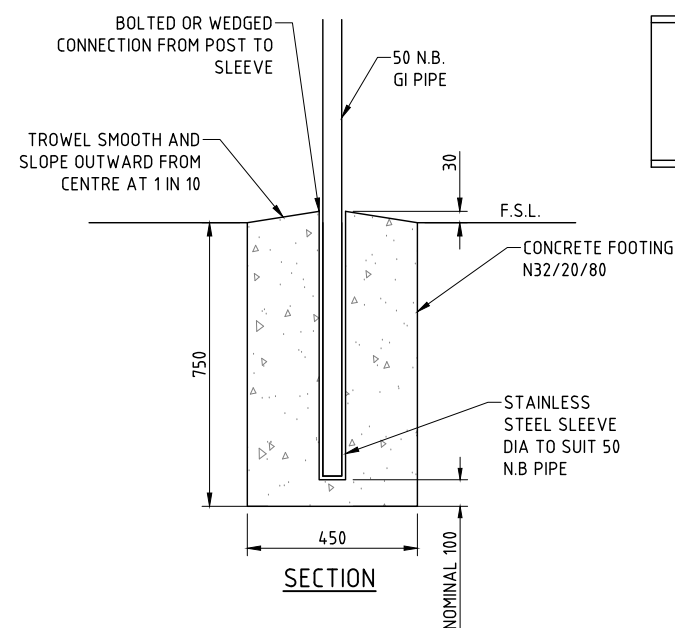

## STREET SIGNS WITH LOGO

1	REISSUED AS A STANDARD DRAWING	APR 23	KS	BYRNE
0	ISSUED AS A STANDARD DRAWING	AUG 20	KS	BYRNE
No.	AMENDMENT DESCRIPTION	DATE	INIT.	DEPT/COMPANY

Drawn	Checked
KS	PB
Date: AUGUST 2020	Date: AUGUST 2020
Designed	Checked
PB	SPB
Date: AUGUST 2020	Date: AUGUST 2020
Design Project Leader	NTG Project Manager
SPB	N/A
Date: AUGUST 2020	Date: AUGUST 2020



SUBDIVISION DEVELOPMENT GUIDELINES STANDARD DRAWINGS  
STREETS AND PATHWAYS

## STREET NAME SIGNS TYPICAL DETAILS

NTG Project No.	NTG Asset No.	Sheet Reference	NTG Drawing No.	Amendment	
-	-	1 OF 1	SS1010	1	A1